



ESP32-S3


RATED VOLTAGE: 3.3V.
RATED CURRENT: 500MA MAX.
FREQUENCY: 2412-2484MHZ WI-FI 2.4GHZ
2402-2480MHZ BLE

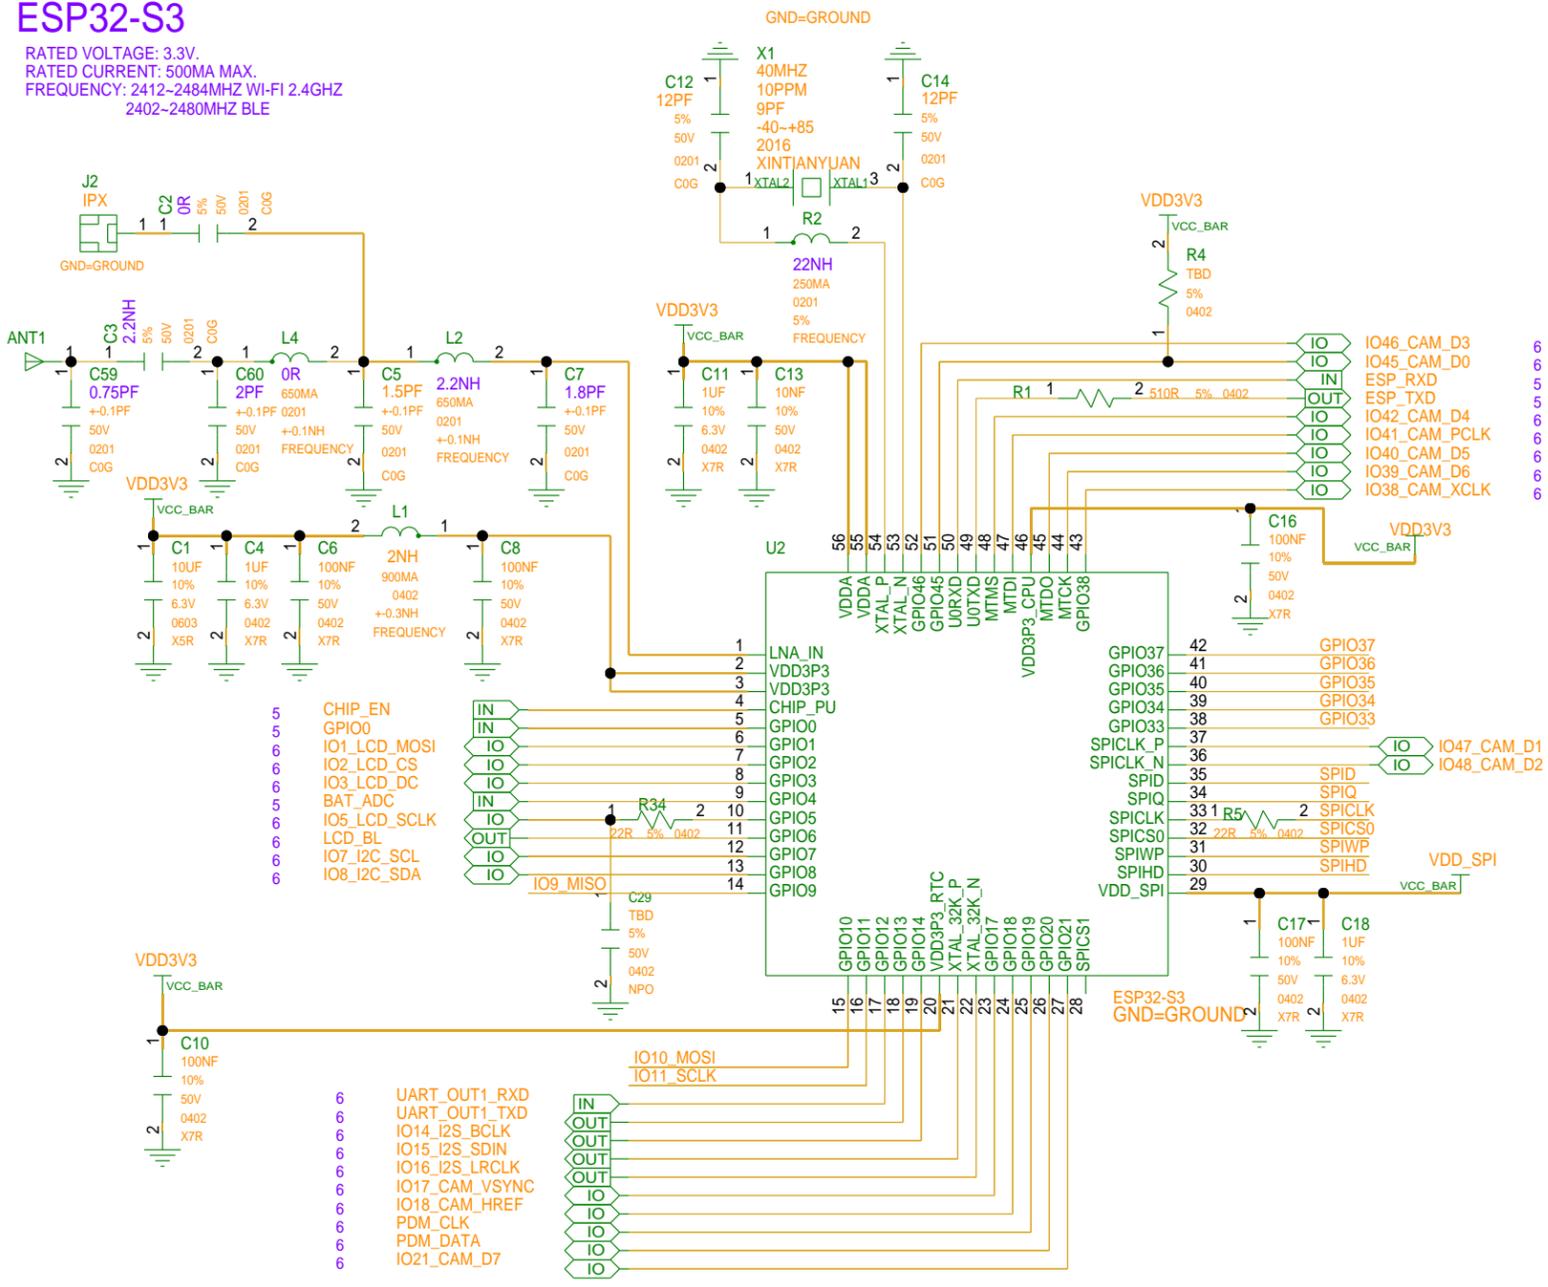


SD CARD

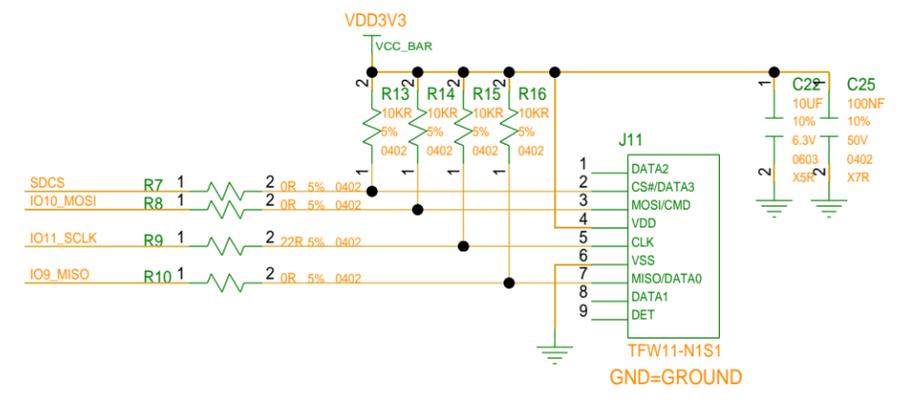


I/O EXTENSIONS

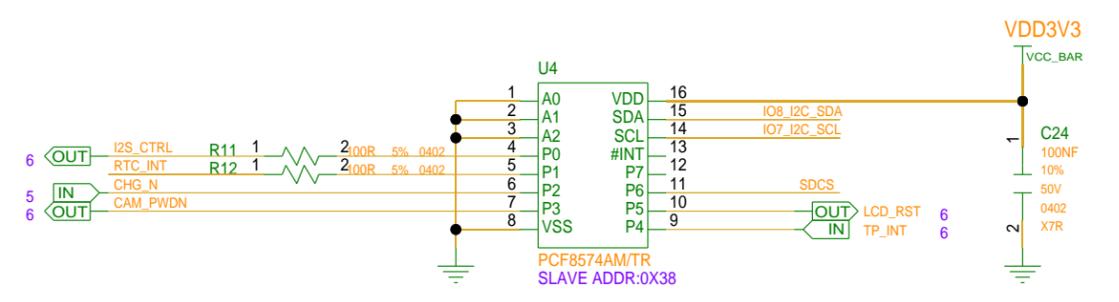


RTC

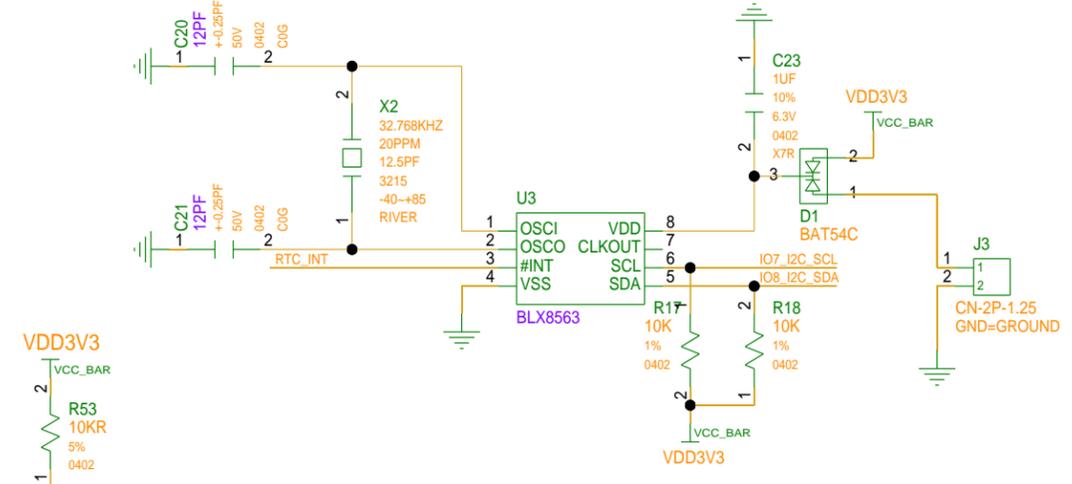


FLASH

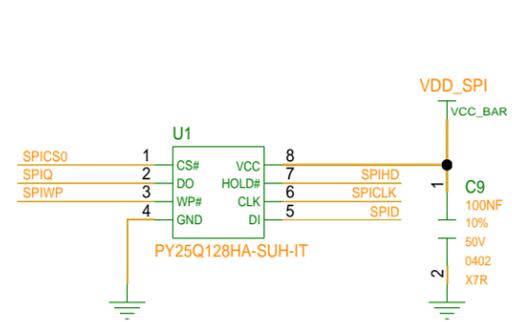

BOOT




RST

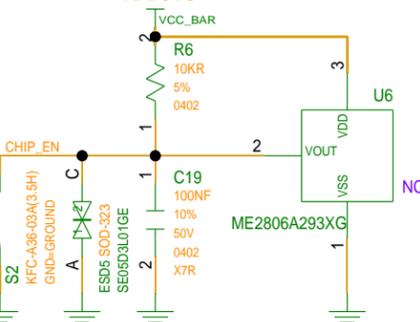


TITLE:	PAGE4	DATE:	2025-08-16
ENGINEER:	XINCHENG.LU	PAGE:	4 OF 6


POWER ON

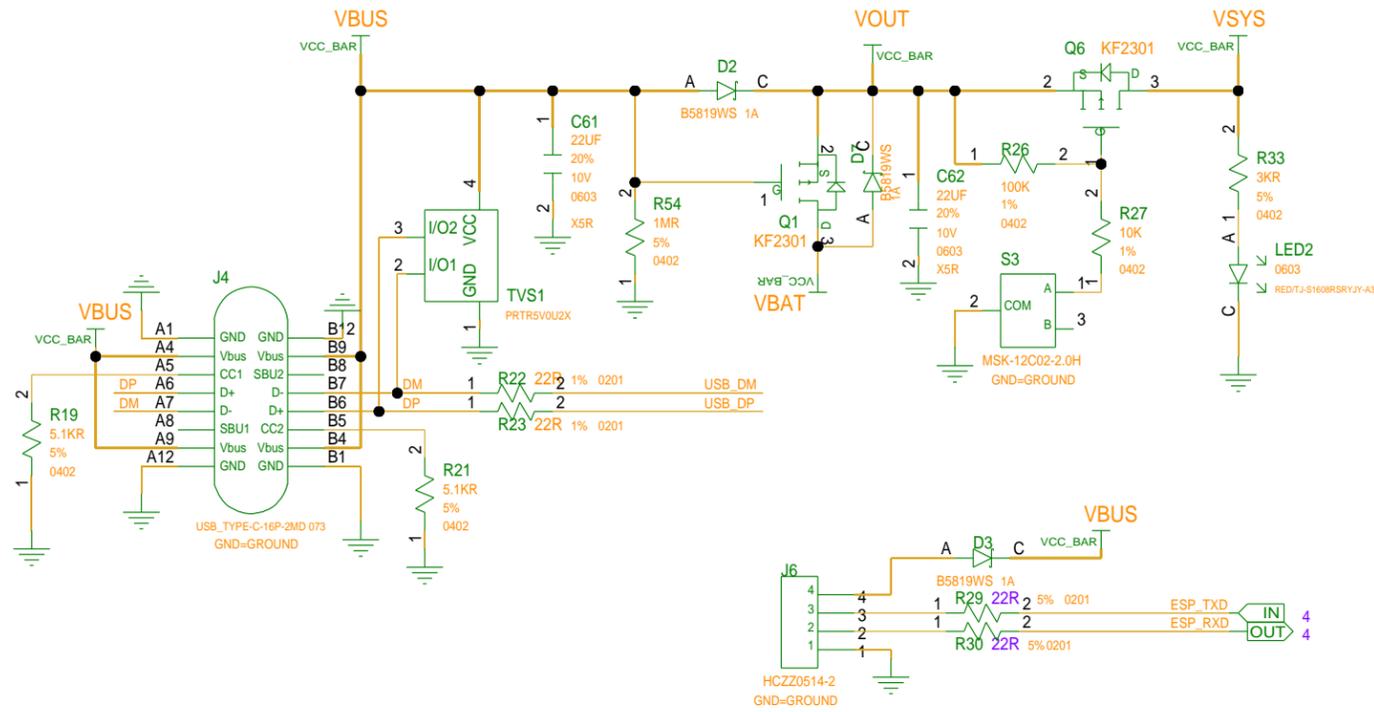


USB TO TTL / UART INPUT

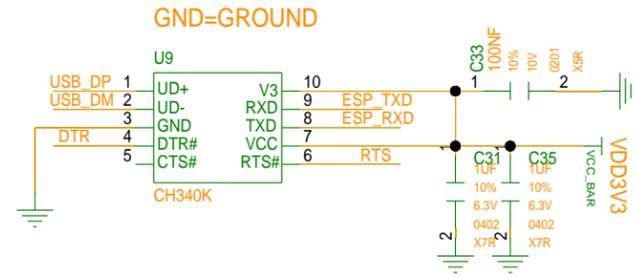

AUTO PROGRAM

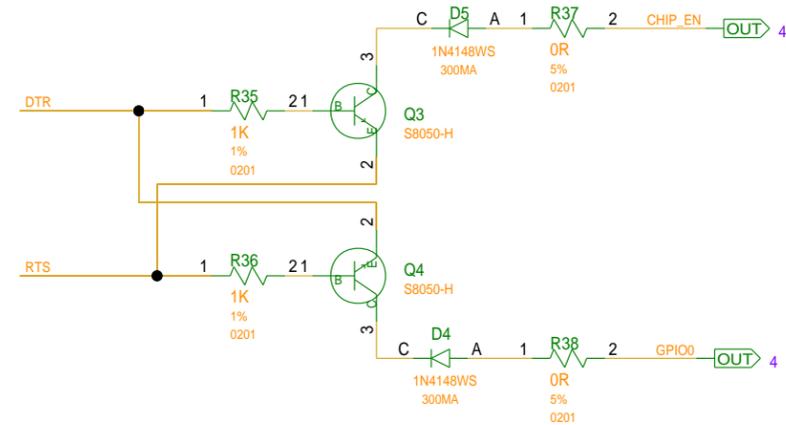


CHARGE

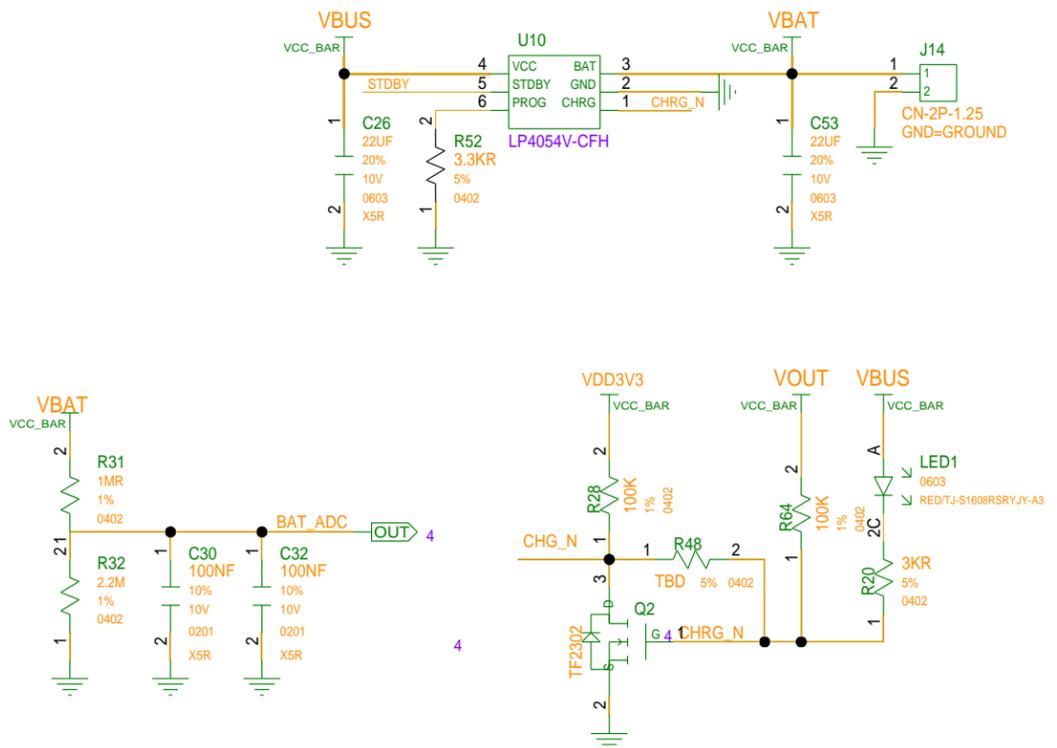

DCDC

INPUT VOLTGE: 2.6V~5.5V
CURRENT: 1.5A MAX.
PWM RANGE: 1.6MHZ TO 2.4MHZ

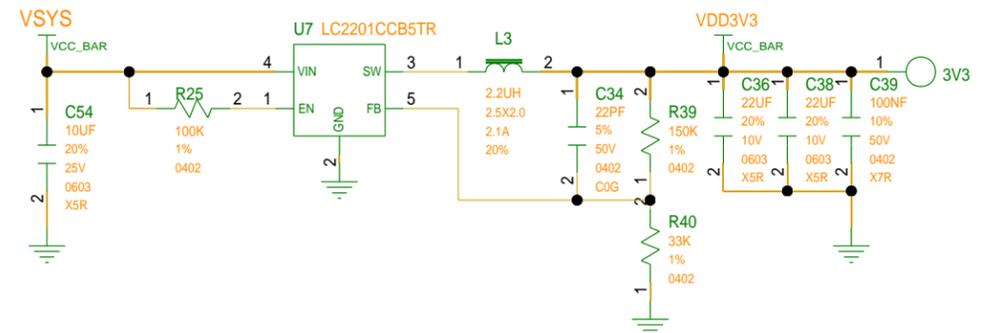

TITLE:	PAGE5	DATE:	2025-08-16
ENGINEER:	XINCHENG.LU	PAGE:	5 OF 6

